


RND

- ▶ 2.0*1.2*0.5mm 小型、超薄
- ▶ 2P KHZ 精准频率、±10PPM 高精度
- ▶ -40°C ~ +85°C, 优良的耐环境性
- ▶ 滚边焊、满足无铅焊接的回流温度曲线要求
- ▶ 符合 RoHS、Reach 认证标准

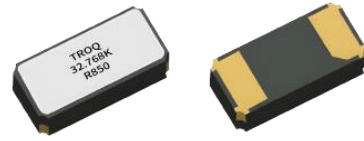


技术参数 Technical Parameter

频率范围	Frequency Range	32.768KHz
高阶谐振	Overtone	Fundamental
频率稳定度	Frequency Tolerance (at 25°C)	±20ppm, or specify
频率温度系数	Parabolic curvature constant	-0.04ppm / (Δ°C) Maximum
工作温度范围	Operating Temperature Range	-40 ~ +125°C
驱动电平	Drive Level	0.5μW Max.
负载电容	Load Capacitance	7pF, 9pF, 12.5pF
储存温度范围	Storage Temperature Range	-55 ~ +125°C
静电容	Static Capacitance	1.0pF typical
动态电容	Motional Capacitance	3.4fF typical
老化率	Aging Rate	±3ppm / year Maximum

谐振电阻 Resonance Resistance

Fundamental
120KΩ MAX

外观尺寸 Dimension(Unit:mm)

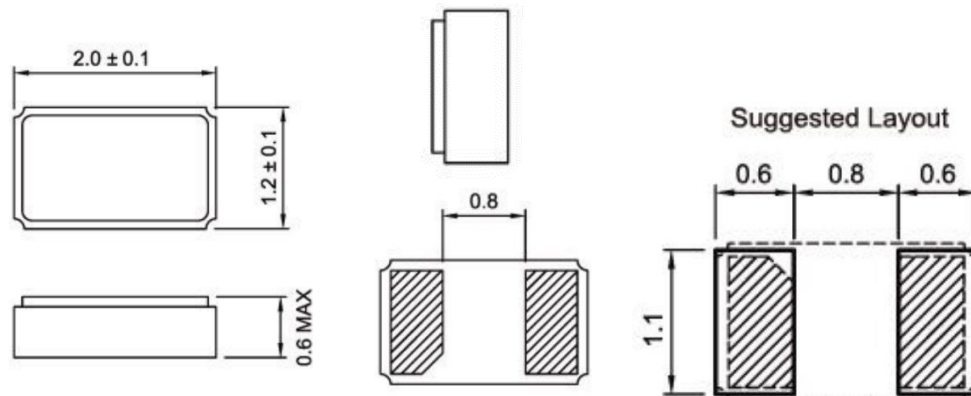

Units:mm