


RP

- ▶ 3.2*2.5*0.9mm, 2P 陶瓷焊缝工艺制作
- ▶ 瓷焊缝工艺制作
- ▶ 10ppm 高精度、高频率稳定性
- ▶ 符合 RoHS、Reach 认证标准, 绿色环保




技术参数 Technical Parameter

频率范围	Frequency Range	8.000MHz ~ 54.000MHz
振动模式	Mode	FUND
频率偏差	Frequency Deviation	±10ppm ~ ±30ppm
频率温度特性	Frequency Temperature Characteristics	±10ppm ~ ±30ppm
工作温度范围	Operating Temperature Range	-40°C ~ +85°C, or specify
储存温度范围	Storage temperature Range	-40°C ~ +85°C / -40°C ~ +125°C
老化率	Aging Rate	±3ppm / year Maximum
负载电容	Load Capacitance	4PF ~ ∞(Series)
静电容	Static Capacitance	<5pf
谐振电阻	Resonance Resistance	见下表 / SEE PAGE
激励电平	Drive Level	Typ.100μW

等效串联电阻 (ESR)

频率范围	谐振电阻
8 ~ 12MHz	250Ω Max.
12 ~ 20MHz	100Ω Max.
20 ~ 30MHz	80Ω Max.
30 ~ 54MHz	60Ω Max.

外观尺寸 Dimension(Unit:mm)

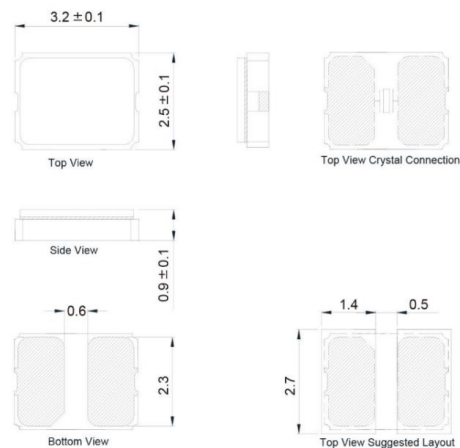

Units: mm