


## RY

- ▶ 1.6\*1.2\*0.65mm 小型、超薄
- ▶ 表面安装石英晶体单元与热敏电阻
- ▶ -40°C ~ +85°C, 优良的耐环境性
- ▶ 滚边焊、满足无铅焊接的回流温度曲线要求
- ▶ 符合 RoHS、Reach 认证标准



### 技术参数 Technical Parameter



|        |                                       |                             |
|--------|---------------------------------------|-----------------------------|
| 频率范围   | Frequency Range                       | 26MHz、38.4MHz、52MHz、76.8MHz |
| 振动模式   | Mode                                  | FUND                        |
| 频率偏差   | Frequency Deviation                   | ±10ppm or specify           |
| 频率温度特性 | Frequency Temperature Characteristics | ±10ppm or specify           |
| 工作温度范围 | Operating Temperature Range           | -30°C ~ +85°C or specify    |
| 储存温度范围 | Storage temperature Range             | -40°C ~ +125°C              |
| 老化率    | Aging Rate                            | ±3ppm / year                |
| 负载电容   | Load Capacitance                      | 7pF, 9pF or specify         |
| 静电容    | Static Capacitance                    | <3pf                        |
| 热敏电阻值  | Thermistor Resistance (25°C)          | 100KΩ or specify            |
| 激励电平   | Drive Level                           | 100μW                       |

### 谐振电阻 Resonance Resistance

FUND

80Ω MAX

### 外观尺寸 Dimension(Unit:mm)

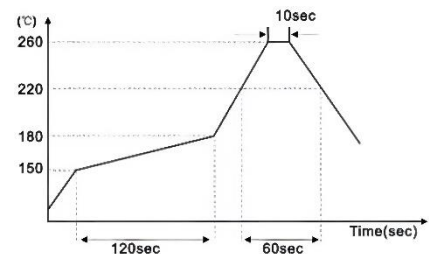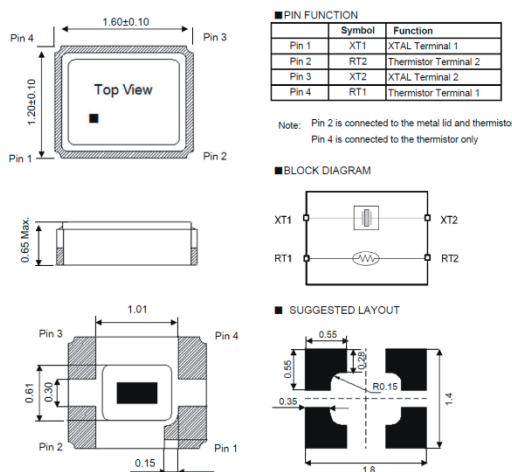

Solder melting point: 220°C  
Total time: 200sec Max

Units: mm